


Tree Protection Details

Fencing Requirements

- Erect fence around perimeter of Tree Protection Zone (TPZ)
- Ensure fencing is securely anchored
- Fence is to remain in place until construction is complete
- Fencing must be at least 1.2 metres in height
- No materials are to be stored within the TPZ

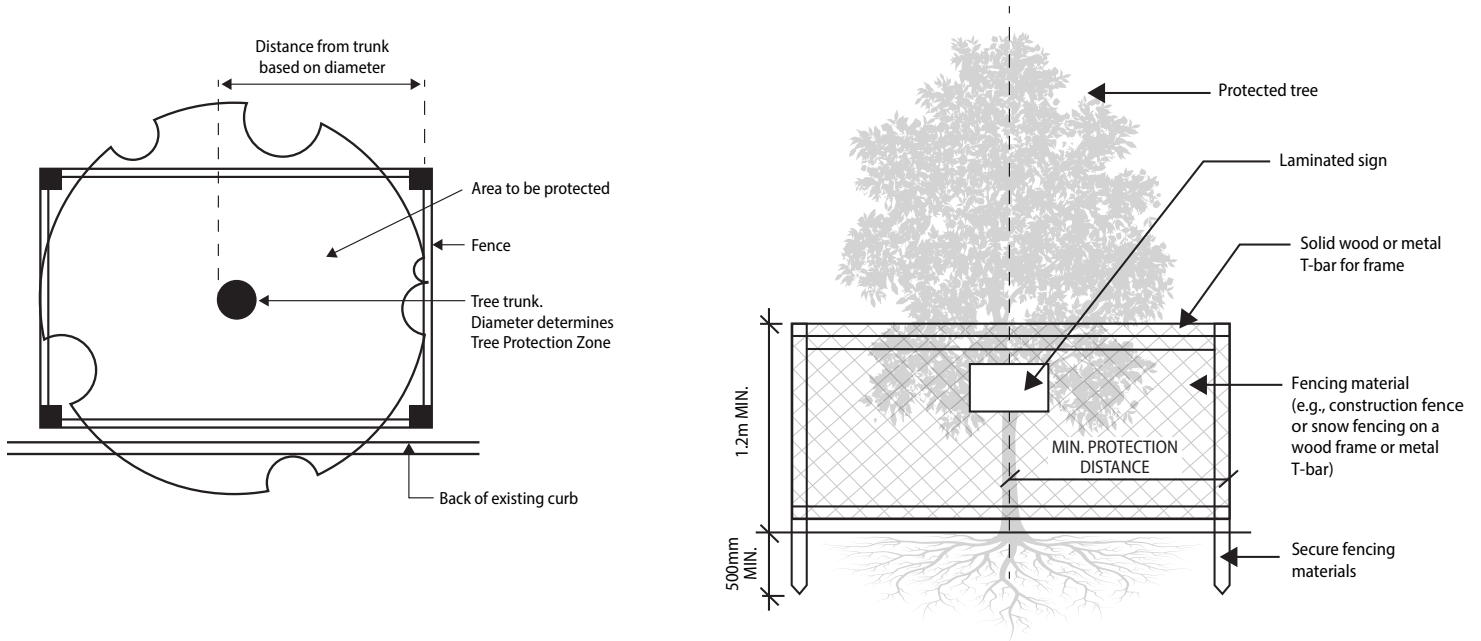

Anti-Compaction Measures

Anti-compaction measures are essential to protect a tree's root system. Compacted soil restricts the movement of air, water and nutrients to the roots. Anti-compaction measures must be installed where heavy equipment, vehicles or machinery and/or material storage may occur within six metres of a City tree. Suitable materials include ground protection mats, $\frac{3}{4}$ " plywood on top of 8" mulch or other methods directed by Urban Forestry.

