


CAST-IN-PLACE CB OUTLET

- 250 mm ϕ x 300 mm LONG SDR35 PVC C/W BONDED EXTERIOR GROUT COAT
- END BEVELLED TO PVC PIPE SPECIFICATIONS
- SLOPED FOR DISCHARGE AT 3% GRADE

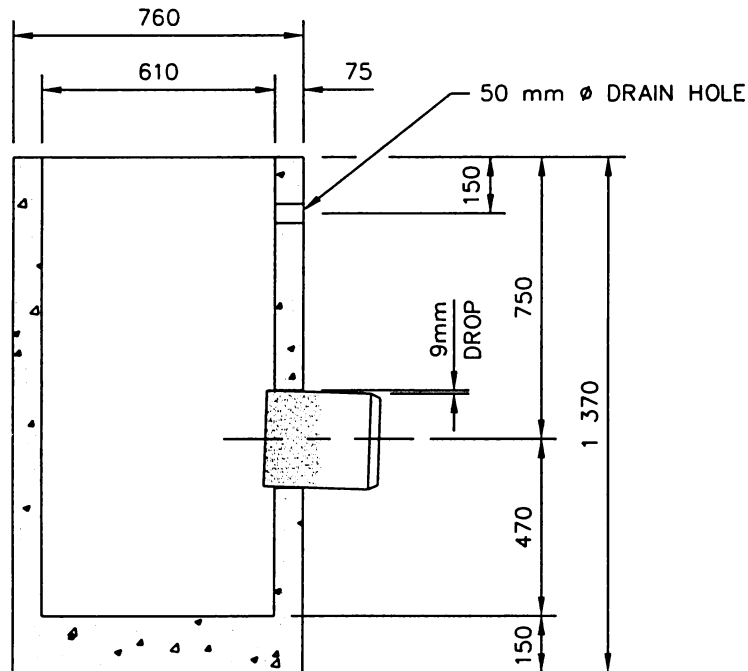

SPECIFICATIONS

- MANUFACTURED IN ACCORDANCE WITH A.S.T.M. SPECIFICATIONS C-478 & ALL CURRENT REVISIONS.
- MINIMUM CONCRETE STRENGTH SHALL BE 27.6 MPa IN 28 DAYS.
- REINFORCING STEEL FOR BASE SHALL BE 10 M REINFORCING RODS PLACED 150 mm O.C. EACH WAY.
- ALL CONCRETE SHALL BE PLACED MONOLITHICALLY.

ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE NOTED

<p>REVISIONS</p> <table border="1"> <tr> <td>1</td> <td>REDRAWN 98-03-04</td> </tr> <tr> <td>2</td> <td></td> </tr> <tr> <td>3</td> <td></td> </tr> </table>		1	REDRAWN 98-03-04	2		3		<p>INFRASTRUCTURE SERVICES</p> <p>City of Saskatoon</p>	<p>APPROVED</p> <p><i>[Signature]</i></p> <p>GENERAL MANAGER P. ENG.</p> <p><i>A. Boyko</i></p> <p>ENGINEER</p>
1	REDRAWN 98-03-04								
2									
3									
<p>DRAWN BY <u>MJ</u></p> <p>DATE <u>98-03-04</u></p> <p>CHECKED BY _____</p> <p>DATE _____</p>		<p>ENGINEER _____</p> <p>SCALES : HOR. <u>1:20</u> VERT. _____</p> <p>08020-DID PLAN NO. 102-0010-007r001</p>							
<p>PRECAST REINFORCED ROUND CATCH BASIN</p>									